



INDUSTRIAL GRINDERS



TCII-1564P MODEL



TCII-1564P MODEL



TCII-1564P MODEL
W/ SIDE-SLIDE THROW
OBJECT RESTRAINT SYSTEM

MONSTER PRODUCTION!



**THE MONSTER
TUB GRINDER!**



TCII-1664W MODEL

All TC HogZilla Models are built to be the world's most reliable high capacity grinders, assuring maximum production. All TC models use a Torque Converter to drive the hammermill which multiplies engine torque for maximum production.

**TC
SERIES**

Whether you grind stumps and logs by the acre, wood waste by the ton or green waste by the yard, HogZilla is manufactured to provide maximum production per hour.


HogZilla is built for reliability providing you the most profit. It delivers performance you can bank on!

One loader/excavator operator can feed the HogZilla, controlling it by remote control and the 60° radial stacking elevator enables longer production runs.

The TCII variation of the TC Series has a hammermill assembly that can be changed to a variety of different swing diameters in the field. This enables easy customization of the machine to match specific grinding needs. Maximum efficiency and productivity can be fine-tuned for any application. It also offers a significant added benefit in future resale value since TC grinders are the only machine that can be easily transformed to match any future buyers individual preference in mill diameter and depth of cut.

Check out HogZilla's Features, Quality and Workmanship.

You'll see why TC HogZilla Grinders are the Most Reliable, High Production Grinders in the world.

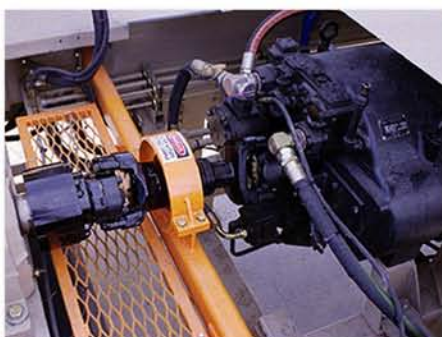

When the load on the hammermill increases, the hydraulic fluid is automatically re-routed against the turbine blades, adding approx. 30% additional reaction torque to engine torque. The engine is protected by the torque converter fluid absorbing shock loads and torsional vibrations from the hammermill, assuring longer engine life.

Standard Features

- Torque Converter w/ 5yr warranty
- Electronic Horsepower Controller
- Remote Control
- 60° Radial Stacking Elevator
- Trougher Roller Conveyors
- Vulcanized Conveyor Belts
- Radiator Precleaner Enclosure
- Diesel Service Engine
- Auxiliary Hydraulic Power
- Air Compressor
- Hydraulic Rod Puller

Optional Equipment

- Bolt-In Tire Grinding Package
- Back-side Mill Deflector
- Custom Thrown Object Restraint Variations
- Weld-on & Bolt-on Tip Variations
- Rigid & Swing Hammer Variations
- Custom Fire Suppression Variations
- Mulch Color Attachment

TC SERIES

NOTE: Additional options are available upon request, and custom variations may be available within the options upon request. Some options influence the capabilities, safety, performance, weight, & portability of the machine.

Production Rates (tons per hour)*

Yardwaste - 150-200
Stumps & Logs - 85-120
Pallets/Construction Waste - 75-120

*Rates will vary with input material characteristics, discharge material requirements, machine set up, machine options selected, & operating procedures.

SPECIFICATIONS	TCII-1664W	TCII-1564P	TAC-1564P	TC-1564P
CAT C32 Standard Engine	1000hp	1000hp	1000hp	1000hp
Hammer-Swing	46" x 64"	38" or 46" x 64"	38" x 64"	36" x 64"
Screen Area	5480 _{sq.in.}	4610 or 5480 _{sq.in.}	4610 _{sq.in.}	4990 _{sq.in.} 7" Floor
Screen Thickness	1 1/4"	3/4" - 1 3/4" / 1"	3/4" - 1 3/4"	3/4" - 1 3/4"
Hammer Weight	110#	80 or 110#	80#	60#
Hammer Number	24 - 48	24 - 48	24 - 48	24 - 48
Rod Diameter	3"	3"	3"	3"
Tub Top Width	16'	15'	15'	15'
Conveyor/Elevator Belts	72" & 60"	48" & 42"	48" & 42"	48" & 42"
Trans. Width	13' - 11"	11' - 11"	11' - 11"	11' - 11"
Trans. Length	61' - 9"	56' - 3"	56' - 3"	56' - 3"
Total Weight (approx.)	130,000 lbs	92 - 94,000 lbs	88 - 94,000 lbs	86 - 92,000 lbs

Specifications subject to change without notice. As improvements are made, actual product offered for sale may vary in design.

MONSTER PRODUCTION!



CW MILL EQUIPMENT CO., INC.
14 Commerce Dr., Sabetha, Kansas 66534
785-284-3454 or 800-743-3491 Fax: 785-284-3601
Web: hogzilla.com Email: hogzilla@cwmill.com